

OVIA



Low Energy CFLi Lighting



230V IP54 Angled Aluminium Wall Light

code	no. of lamps	lampholder type	max wattage
LE601AL	1	GX53	9W

C/W Selected Lamp.

LED options for LE601AL fitting are available on page b12.

Available Finishes



Aluminium


CFLi Colour Options (*)



9W
Cool White



9W
Warm White

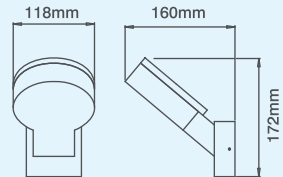

Product Approvals


Good protection against ingress of dust and moisture. Complies with BS EN 60598.

Please add lamp option on to the code e.g. **LE601AL9C**.

LOW ENERGY CFLi LIGHTING - Surface Mounted Angled Aluminium Wall Light



230V IP54 Angled Aluminium Wall Light

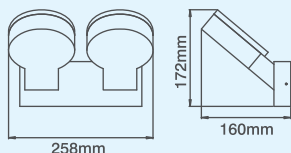

code	no. of lamps	lampholder type	max wattage
LE602AL↓	2	GX53	2 x 9W

C/W Selected Lamp.

LED options for LE602AL fitting are available on page b13.

Available Finishes



Aluminium

CFLi Colour Options (↓)



9W
Cool White



9W
Warm White

Product Approvals

Good protection against ingress of dust and moisture.
Complies with BS EN 60598.

Please add lamp option on to the code e.g. **LE602AL9W**.



230V Low Energy IP44 Wall Light

code	no. of lamps	lampholder type	max wattage
LE611CH11W	1	E14	15W


C/W Selected Lamp.

LED options for LE611CH fitting are available on page b14.

Available Finishes




CFLi Colour Options (*)

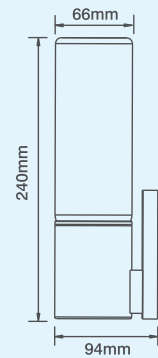

Product Approvals
Complies with BS EN 60598.

Please add lamp option on to the code e.g. **LE611CH11W**.

LOW ENERGY CFLi LIGHTING - Surface Mounted Wall Lights

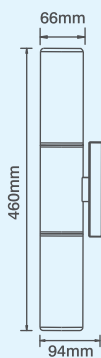

230V Low Energy IP44 Wall Light

code	no. of lamps	lampholder type	max wattage
LE612CH11W	2	E14	2 x 15W

C/W Selected Lamp.

LED options for LE612CH fitting are available on page b15.

Available Finishes



Chrome

CFLi Colour Options (♦)

11W

11W Warm White

Product Approvals

Complies with BS EN 60598.

Please add lamp option on to the code e.g. **LE612CH11W**.



Product Approvals
Complies with BS EN 60598.

LOW ENERGY CFLi LIGHTING - Surface Mounted
Klarheit Wall Light





230V 'Klarheit' Compact Fluorescent Wall Light

code	no. of lamps	lampholder type	max wattage
CF240SV	1	G24q GX24q	26W 32W
Lamp not included.			

Available Finishes



Silver

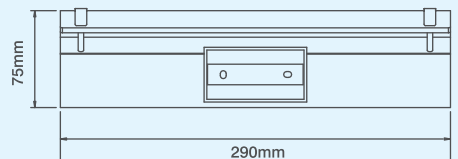



CFLi



Product Approvals
Complies with BS EN 60598.

LOW ENERGY CFLi LIGHTING - Surface Mounted
Klarheit Wall Light





230V 'Klarheit' Low Energy Wall Light

code	no. of lamps	lampholder type	max wattage
LE510SV Lamp not included.	1	T5 (549MM)	24W

Available Finishes



Silver

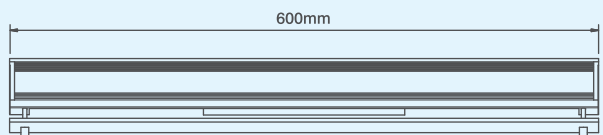



Product Approvals
Complies with BS EN 60598.

LOW ENERGY CFLi LIGHTING - Surface Mounted

Klarheit Wall Light






230V 'Klarheit' Low Energy Adjustable Wall Light

code	no. of lamps	lampholder type	max wattage
LE520SV Lamp not included.	2	T5 (549MM)	2 x 24W

Available Finishes



Silver

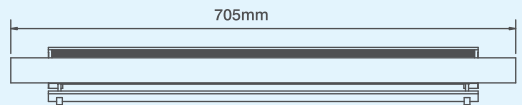

CFLi



Product Approvals
Complies with BS EN 60598.



LOW ENERGY CFLi LIGHTING - Surface Mounted
Klarheit Suspended Light





230V 'Klarheit' Low Energy Suspended Light

code	no. of lamps	lampholder type	max wattage
LE530SV Lamp not included.	2	T5 (849MM)	2 x 39W

Available Finishes



Silver

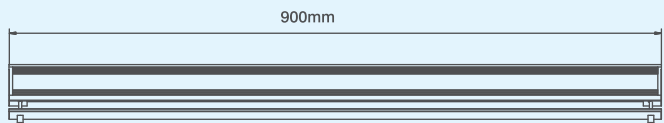

Drop = 150mm to 1500mm




230V IP65 Miniature Downlighter

code	no. of lamps	lampholder type	max wattage
CF096	1	GU10	13W

See cast IP65 profiled bezel on opposite page.

Lamp sold separately, please see the Energetic catalogue for more details.

code	features	dims (mm)	cutout (mm)	volts	watts
CG015	In-Line Maintained Em/Pack	45x38x860	60	230	15

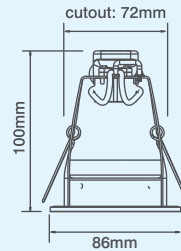

Product Approvals
Complies with BS EN 60598.

LOW ENERGY CFLi LIGHTING - Flush Mounted Cast IP65 Profiled Bezel



Images illustrate various bezel options with fitting

GF495 Bezel



GF590 Bezel



Cast IP65 Profiled Bezel

code

description

Cast Shower Light Lens For Use With CF096

GF495*

cast lens for IP65 down light

GF590*

cast IP65 profile bezel

Product Approvals

Complies with BS EN 60598.

Available Finishes (*)

WH

White

CH

Chrome

SC

Satin Chrome

BR

Brass

Please add required finish on to the code e.g. **GF495BR**.



230V Fixed Compact Downlighter - protruding lamp

code	no. of lamps	lampholder type	max wattage
LE015*	1	GX53	13W


code	description	dimensions	cutout (mm)	supply (mm)	max wattage
CG015	In-Line Maintained Em/Pack	45 x 38 x 860	60	230	15

Lamp sold separately, please see the Energetic catalogue for more details.
LED options for LE015 fitting are available on page b36.

Available Finishes (+)




Please add required finish on to the code e.g. **LE015SC**.

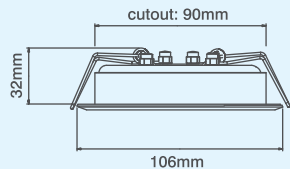

Product Approvals
Complies with BS EN 60598.

LOW ENERGY CFLi LIGHTING - Flush Mounted Compact Downlighter

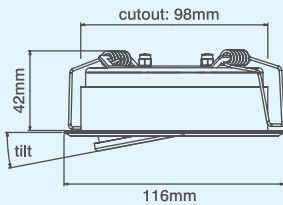

230V Adjustable Compact Downlighter - protruding lamp

code	no. of lamps	lampholder type	max wattage	rotation	tilt
LE020*	1	GX53	13W	n/a	10°

code	description	dimensions	cutout (mm)	supply (mm)	max wattage
CG015	In-Line Maintained Em/Pack	45 x 38 x 860	60	230	15

Lamp sold separately, please see the Energetic catalogue for more details.
LED options for LE020 fitting are available on page b37.

Available Finishes (*)

WH

White

CH

Chrome

SC

Satin Chrome

Product Approvals

Complies with BS EN 60598.



Please add required finish on to the code e.g. **LE020WH**



230V Fixed Compact Downlighter - Flush Lamp

code	no. of lamps	lampholder type	max wattage
LE035*	1	GX53	13W

code	description	dimensions	cutout (mm)	supply (mm)	max wattage
CG015	In-Line Maintained Em/Pack	45 x 38 x 860	60	230	15

Lamp sold separately, please see the Energetic catalogue for more details.
LED options for LE035 fitting are available on page b38.

Available Finishes (+)




White



Chrome




Satin Chrome

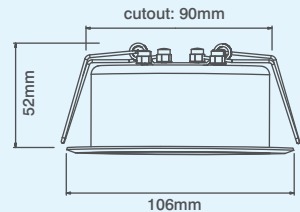

Product Approvals
Complies with BS EN 60598.

Please add required finish on to the code e.g. **LE035SC**.

LOW ENERGY CFLi LIGHTING - Flush Mounted Compact Downlighter

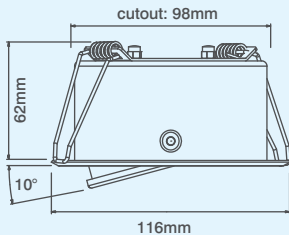

230V Adjustable Compact Downlighter - Flush Lamp

code	no. of lamps	lampholder type	max wattage	rotation	tilt
LE040*	1	GX53	13W	n/a	10°

code	description	dimensions	cutout (mm)	supply (mm)	max wattage
CG015	In-Line Maintained Em/Pack	45 x 38 x 860	60	230	15

Lamp sold separately, please see the Energetic catalogue for more details.
LED options for LE040 fitting are available on page b39.

Product Approvals
Complies with BS EN 60598.



Available Finishes (*)

WH

White

CH

Chrome

SC

Satin Chrome


Please add required finish on to the code e.g. **LE040CH**



230V CFL Vertical Open Downlighter

code	no. of lamps	lampholder type	max wattage
CF145WH	1	G24q / GX24q (4 Pin)	10W TO 42W

Lamp not included.

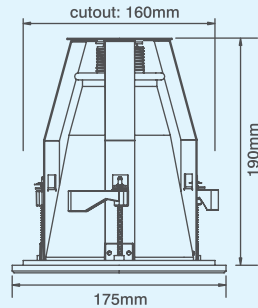

Available Finishes

WH

White

Product Approvals
 Complies with BS EN 60598.



Compact fluorescent modular downlighters offer a number of options and setups. Each downlighter needs modular control gear, with a dimmable option available. Emergency packs are also available to run a single lamp for up to 3 hours.

See page b72 for full details.

Product Approvals

Complies with BS EN 60598.

230V Control Gear and Emergency Packs

code	description	length (mm)	width (mm)	depth (mm)
Standard HF Gear (Non-dimmable)				
CG4118	1 X 18W	119	67	30
CG4126	1 X 26W	119	67	30
CG4132	1 X 32W	119	67	30
CG4142	1 X 42W	119	67	30
Dimmable HF Gear				
CG148	1 X 18W	210	90	60
CG150	1 X 26W/32W/42W	210	90	60
Emergency Pack				
CG032	Up To 32W Lamps	475	90	60
CG042	Up To 42W Lamps	475	90	60
Extension Cable				
CG610	Extension cable for Modular CF range	1m	n/a	n/a



CF142



with Glass & Seal



with Full Glass



with Halo Glass



230V CFL Vertical Open Downlighter With Optional Glass

code	no. of lamps	lampholder type	max wattage
CF142WH	1	G24q / GX24q (4 Pin)	10W TO 42W


Lamp not included.

code	description
GF140CG	IP65 Glass and Seal To Fit CF142
GF145CG	Drop Full Glass Kit To Fit CF142 (C/W Collars)
GF147CG	Drop Halo Glass Kit To Fit CF142 (C/W Collars)

Available Finishes

WH

White



Product Approvals
Complies with BS EN 60598.



Single Lamp



Emergency Pack



Compact fluorescent modular downlighters offer a number of options and setups. Each downlighter needs modular control gear, with a dimmable option available. Emergency packs are also available to run a single lamp for up to 3 hours.

See page b72 for full details.

Product Approvals

Complies with BS EN 60598.

230V Control Gear and Emergency Packs


code	description	length (mm)	width (mm)	depth (mm)
Standard HF Gear (Non-dimmable)				
CG4118	1 X 18W	119	67	30
CG4126	1 X 26W	119	67	30
CG4132	1 X 32W	119	67	30
CG4142	1 X 42W	119	67	30
Dimmable HF Gear				
CG148	1 X 18W	210	90	60
CG150	1 X 26W/32W/42W	210	90	60
Emergency Pack				
CG032	Up To 32W Lamps	475	90	60
CG042	Up To 42W Lamps	475	90	60
Extension Cable				
CG610	Extension cable for Modular CF range	1m	n/a	n/a



230V CFL Horizontal Open Downlighter

code	no. of lamps	lampholder type	max wattage
CF245WH	2	G24q / GX24q (4 Pin)	10W TO 42W

Lamps not included.

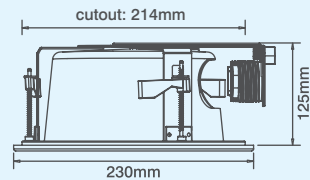

Available Finishes

WH

White

Product Approvals
 Complies with BS EN 60598.

LOW ENERGY CFLi LIGHTING - Flush Mounted Control Gear & Emergency Packs



Single Lamp



Emergency Pack



Compact fluorescent modular downlighters offer a number of options and setups. Each downlighter needs modular control gear, with a dimmable option available. Emergency packs are also available to run a single lamp for up to 3 hours.

See page b72 for full details.

Product Approvals

Complies with BS EN 60598.

230V Control Gear and Emergency Packs

code	description	length (mm)	width (mm)	depth (mm)
Standard HF Gear (Non-dimmable)				
CG4218	2 X 18W	119	67	30
CG4226	2 X 26W	119	67	30
CG4232	2 X 32W	119	67	30
CG4242	2 X 42W	119	67	30
Dimmable HF Gear				
CG250	2 X 26W/32W/42W	210	90	60
Emergency Pack				
CG032	Up To 32W Lamps	475	90	60
CG042	Up To 42W Lamps	475	90	60
Extension Cable				
CG610	Extension cable for Modular CF range	1m	n/a	n/a



CF242



with Glass & Seal



with Full Glass



with Halo Glass



230V CFL Horizontal Open Downlighter With Optional Glass

code	no. of lamps	lampholder type	max wattage
CF242WH	2	G24q / GX24q (4 Pin)	10W TO 42W


Lamps not included.

code	description
GF240CG	IP65 Glass and Seal To Fit CF242
GF245CG	Drop Full Glass Kit To Fit CF242 (C/W Collars)
GF247CG	Drop Halo Glass Kit To Fit CF242 (C/W Collars)

Available Finishes

WH

White



Product Approvals
Complies with BS EN 60598.

LOW ENERGY CFLi LIGHTING - Flush Mounted Control Gear & Emergency Packs



Twin Lamp



Emergency Pack



Compact fluorescent modular downlighters offer a number of options and setups. Each downlighter needs modular control gear, with a dimmable option available. Emergency packs are also available to run a single lamp for up to 3 hours.

See page b72 for full details.

Product Approvals

Complies with BS EN 60598.

230V Control Gear and Emergency Packs

code	description	length (mm)	width (mm)	depth (mm)
Standard HF Gear (Non-dimmable)				
CG4218	2 X 18W	119	67	30
CG4226	2 X 26W	119	67	30
CG4232	2 X 32W	119	67	30
CG4242	2 X 42W	119	67	30
Dimmable HF Gear				
CG250	2 X 26W/32W/42W	210	90	60
Emergency Pack				
CG032	Up To 32W Lamps	475	90	60
CG042	Up To 42W Lamps	475	90	60
Extension Cable				
CG610	Extension cable for Modular CF range	1m	n/a	n/a



Full Glass



Drop Glass



230V CFL Square Horizontal Downlighter



code	no. of lamps	lampholder type	max wattage
CF442WH	2	G24q / GX24q (4 Pin)	10W TO 42W

Lamps not included.

230V 2x42W Max. CF Horizontal Drop Glass Downlighter

CF542WH	2	G24q / GX24q (4 Pin)	10W TO 42W
---------	---	----------------------	------------

Lamp not included.

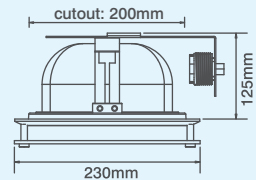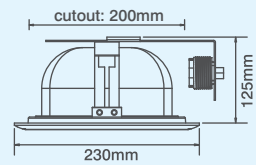

Available Finishes

WH

White

Product Approvals

Complies with BS EN 60598.

LOW ENERGY CFLi LIGHTING - Flush Mounted Control Gear & Emergency Packs



Twin Lamp



Emergency Pack



Compact fluorescent modular downlighters offer a number of options and setups. Each downlighter needs modular control gear, with a dimmable option available. Emergency packs are also available to run a single lamp for up to 3 hours.

See page b72 for full details.

Product Approvals

Complies with BS EN 60598.

230V Control Gear and Emergency Packs

code	description	length (mm)	width (mm)	depth (mm)
Standard HF Gear (Non-dimmable)				
CG4218	2 X 18W	119	67	30
CG4226	2 X 26W	119	67	30
CG4232	2 X 32W	119	67	30
CG4242	2 X 42W	119	67	30
Dimmable HF Gear				
CG250	2 X 26W/32W/42W	210	90	60
Emergency Pack				
CG032	Up To 32W Lamps	475	90	60
CG042	Up To 42W Lamps	475	90	60
Extension Cable				
CG610	Extension cable for Modular CF range	1m	n/a	n/a



LE120WH



with Glass & Seal



with Full Glass



with Halo Glass



230V CFLi Horizontal Open Downlighter With Optional Glass

code	no. of lamps	lampholder type	max wattage
LE120WH	1	E27	20W


Includes CT101C.
Supplied with 20W CFLi U-Line Lamp.

code	description
GF140CG	IP65 Glass and Seal To Fit LE120WH
GF145CG	Drop Full Glass Kit To Fit LE120WH (C/W Collars)
GF147CG	Drop Halo Glass Kit To Fit LE120WH (C/W Collars)

Available Finishes (+)

WH

White

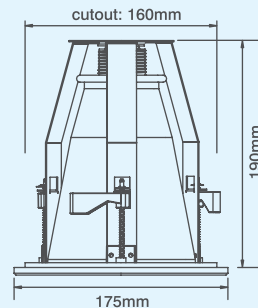

Product Approvals
Complies with BS EN 60598.

LOW ENERGY CFLi LIGHTING - Flush Mounted Compact Fluorescent Downlighter



LE220WH



with Glass & Seal




with Full Glass



with Halo Glass



230V CFLi Horizontal Open Downlighter With Optional Glass



code	no. of lamps	lampholder type	max wattage
LE220WH	2	E27	2 x 20W

Includes CT101C.
Supplied with 20W CFLi U-Line Lamp.

code	description
GF240CG	IP65 Glass and Seal To Fit LE220WH
GF245CG	Drop Full Glass Kit To Fit LE220WH (C/W Collars)
GF247CG	Drop Halo Glass Kit To Fit LE220WH (C/W Collars)

Available Finishes (*)

WH

White

Product Approvals
Complies with BS EN 60598.



Single Lamp



Twin Lamp



Emergency Pack




Product Approvals
Complies with BS EN 60598.

LOW ENERGY CFLi LIGHTING - Flush Mounted

Control Gear & Emergency Packs




High Frequency Control Gear (Non-Dimmable)

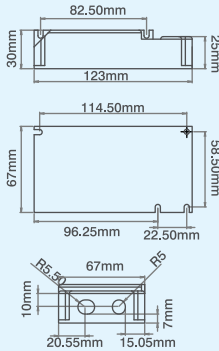

code	description	length (mm)	width (mm)	depth (mm)
CG4118	1 X 18W	119	67	30
CG4126	1 X 26W	119	67	30
CG4132	1 X 32W	119	67	30
CG4142	1 X 42W	119	67	30
CG4218	2 X 18W	119	67	30
CG4226	2 X 26W	119	67	30
CG4232	2 X 32W	119	67	30
CG4242	2 X 42W	119	67	30

High frequency gear as standard to provide energy efficient and trouble free operation. The simple, plug-in facility provided with the high frequency control gear allows fast and easy installation and removal of control gear and fitting in the event of maintenance.


Dimmable High Frequency Control Gear

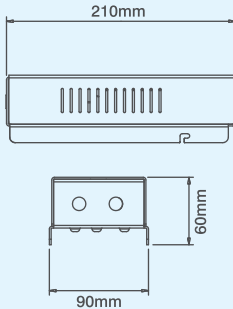

code	description	length (mm)	width (mm)	depth (mm)
CG148	1 X 18W	210	90	60
CG150	1 X 26W/32W/42W	210	90	60
CG250	2 X 26W/32W/42W	210	90	60

Same connection procedure as the standard control gear above with the additional internal connection for installing an analogue 1-10V dimmer switch. 1-10V rotary dimmer switch is available in the CLICK Accessory ranges. The 230V supply should be switched independently.

Emergency Pack



code	description	length (mm)	width (mm)	depth (mm)
CG032	Up To 32W Lamps	475	90	60
CG042	Up To 42W Lamps	475	90	60

The 3 hour non-maintained emergency pack is easily incorporated into a maintained arrangement by the simple inclusion of appropriate control gear. Simple single screw access to terminate incoming cables, with connectors to the control gear and head. The emergency pack illuminates one lamp within a twin lamp head.

A large area of horizontal light blue lines, intended for taking notes. The lines are evenly spaced and cover most of the page's width and height.