



**polar**™

A Premium Range of  
Bright White Accessories



## 20 YEAR No Quibble Guarantee

All Polar™ accessories are covered by our straight forward 'No Quibble Guarantee' against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.

**polar™**

A Premium Range of Bright White Accessories

### Contents

Switches	G5
Back Boxes	G9
Power Socket Outlets	G14
13A Fused Connection Units	G16
Control Switches	G17
Ceiling Accessories	G20
Socket & Blank Plates	G22
Telephone & Data Sockets	G24
TV & Satellite	G25
New Media™ Plates	G26
Patress Boxes	G27
Dry Lining Boxes	G28

The Polar™ range of domestic electrical accessories has been developed as a distinctly different range to the traditional Click® accessory range manufactured by Scolmore International Ltd.

The Polar™ range was born out of a desire to offer a bright white accessory product. Colour choice with accessories is no different to colour choice of wallpaper, paints or other internal decorations. Installers have very definite views on just which tone or shade of white is right for a particular installation.

Given the demand for a different accessory colour we took the opportunity to review all other aspects of the new range including technical features, materials used and the aesthetic appeal of the individual products. The net result is a product quite different in a number of ways to the established Click® product but still offering the same levels of high quality and competitive pricing. So confident are we of the durability and reliability of the Polar™ product that we guarantee these products against any fault in materials or manufacture for no less than 20 years. Polar™ accessories offer added value over the basic versions of similar products offered by our competitors and include the following:

- X rated modular plate switches – Polar™ light switches are all full 10AX rated switches of modular construction. The modular design allows installers infinite flexibility in devising customised switching arrangements. In fact the diversity of the types of modules available within the Polar™ range make this a true domestic grid system.
- Full certification on all 13A socket outlets and fused connection units. These products also feature twin earth terminals as standard.
- 45A shower switches are upgraded to 50A as standard so as to accommodate the growing demand for higher rated power showers.
- The sharp, crisp lines of the Polar™ plates are complemented by gently curved rockers on all switches plus modern grey backs and matching print to switches and plates alike. The modern feel of the Polar™ range is further enhanced by amber coloured neons throughout and matching amber switchgear on the 45A accessories. All neons are flush mounted.

### Antiviral Certified

Polar™ plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses. After a contact period of 4 hours, Polar™ was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.



### Antibacterial Certified

Polar™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.

# Switches

10AX Plate Switches (Modular)  
 10AX Architrave Switches (Modular)  
 Dimmer Switches | Control Switches  
 45A Switches | 50A Pull Switch

A comprehensive selection of light switches, control switches, 45A and 50A switches are available for wall and ceiling mounting. All light switches are 10AX rated and are of modular construction. The wide range of modules available ranges from blanks, 1 way and 2 way, through intermediates, key switches and bell push, to 20A rated double pole switch modules.

All modules are simple 1 screw fixing and therefore offer the ultimate in flexibility when devising a custom made domestic grid installation. All Polar™ modules are fully interchangeable and can be used to replace existing modules or to furnish blank plates. In addition Polar™ modules can be used with all relevant items in the Click® moulded and metal ranges.

The gentle curve on the switch rocker of the module facilitates a smooth switching operation as well as providing a modern and distinctive design feature.



The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates.

For comprehensive information on the full range of modules available please refer to our Minigrid® product brochure.




PRW010 | PRW011




PRW012



PRW013



PRW019



PRW105



PRW811



PRW812



PRW813

**MINIGRID®** Switch modules interchangeable with MiniGrid® Modules in Polar White (PW) finish. For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

#### Plates Switches - MiniGrid®

- PRW010** 10AX 1 Gang 1 Way Plate Switch
- PRW011** 10AX 1 Gang 2 Way Plate Switch
- PRW012** 10AX 2 Gang 2 Way Plate Switch
- PRW013** 10AX 3 Gang 2 Way Plate Switch
- PRW019** 10AX 4 Gang 2 Way Plate Switch
- PRW105** 10AX 6 Gang 2 Way Plate Switch

#### Wide Rocker Switches - Non Modular

- PRW811** 10AX 1 Gang 2 Way Wide Rocker Switch
- PRW812** 10AX 2 Gang 2 Way Wide Rocker Switch
- PRW813** 10AX 3 Gang 2 Way Wide Rocker Switch

Standards: BS EN 60669-1  
 Back Box Depth: 16mm Minimum  
 Cable Size: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
 Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 11mm (D) 2 Gang: 146mm (W) x 86mm (H) x 11mm (D)



PRW015



PRW025



PRW171



PRW172

**MINIGRID®** Switch modules interchangeable with MiniGrid® Modules in Polar White (PW) finish. For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

**Plates Switches**

- PRW015** 10AX 1 Gang 2 Way Paddle Switch
- PRW025** 10AX 1 Gang Intermediate Plate Switch

**Architrave Switches - MiniGrid®**

- PRW171** 10AX 1 Gang 2 Way Architrave Switch
- PRW172** 10AX 2 Gang 2 Way Architrave Switch

Architrave plates can be used with the dedicated architrave pattress boxes PRW175 & PRW176 or standard architrave flush boxes WA671 & WA672. They will also not accept MD070 & MD075 Switch Modules.

Standards: BS EN 60669-1  
 Back Box Depth: 16mm Minimum 171 172: 25mm Minimum  
 Cable Size: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
 Dimensions: 86mm (W) x 86mm (H) x 11mm (D) 171: 32mm (W) x 86mm (H) x 9.5mm (D) 172: 32mm (W) x 146mm (W) x 9.5mm (D)



PRW401



PRW402



PRW403



PRW404



PRW406



PRW426



PRW432

**MINIGRID®** Switch modules interchangeable with MiniGrid® Modules in Polar White (PW) finish. For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

**Unfurnished Plates - MiniGrid®**

- PRW401** 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- PRW402** 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- PRW403** 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- PRW404** 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- PRW406** 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
- PRW426** 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures
- PRW432** 2 Gang MiniGrid® Unfurnished Plate - 3 Apertures

Utilises Polar White (PW) MiniGrid® modules.

Standards: BS 5733  
 Back Box Depth: Dependent On Modules Fitted  
 Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 11mm (D) 2 Gang: 146mm (W) x 86mm (H) x 11mm (D)



PRW612



PRW618



**MINIGRID®**

The furnished plate shown here contains a selection of both single and twin width Minigridd® modules. The yoke 'GR100' is required to mount the Minigridd® modules into prior to assembling the frontplate.

**MINIGRID®**

If dimmer modules are to be mounted directly above each other, the MD9014 (page J37) or similar height dimmer modules must be installed. Alternatively, retractive switch modules MD004 (page J21) can be used in conjunction with Click Smart+ dimming receivers (page A18).

**2 Tier Unfurnished Plates - MiniGrid®**

**PRW612** 2 Tier MiniGrid® Unfurnished Plate & Yokes - 12 Apertures - Polar™  
Complete with yokes

**3 Tier Unfurnished Plates - MiniGrid®**

**PRW618** 3 Tier MiniGrid® Unfurnished Plate & Yokes - 18 Apertures - Polar™  
Complete with yokes

Standards: BS 5733  
Back Box Depth: 47mm Minimum  
Dimensions: 612: 146mm (W) x 153mm (H) x 9.5mm (D) 618: 146mm (W) x 214mm (H) x 9.5mm (D)



WA512



WA518

**MINIGRID®**

Galvanised steel back boxes supplied for flush mounting of the large Minigridd® plates.

**Galvanised Steel Back Boxes**

**WA512** 2 Tier 47mm Deep K.O. Box  
**WA518** 3 Tier 47mm Deep K.O. Box

Standards: BS 4662  
Dimensions: 512: 137mm (W) x 137mm (H) x 47mm (D) 518: 137mm (W) x 197mm (H) x 47mm (D)



PRW140 | PRW145



PRW146



PRW147



PRW148

**Dimmer Modules**

- MD9001** 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
- MD9010** 1-10V Analogue Dimmer Module (25 x 62mm)
- MD9022** 250W 2 Leading Edge Way Dimmer Module (25 x 62mm)
- MD9042** 400W 2 Way Leading Edge Dimmer Module (25 x 62mm)
- MD9014** 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)



SP900

MD9014

**Dimmer M10 Nut Runner**

- SP900** Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate

**Dimmer Switches (Leading Edge)**

- PRW140** 1 Gang 2 Way 400Va Dimmer Switch
- PRW145** 1 Gang 2 Way 250Va Dimmer Switch
- PRW146** 2 Gang 2 Way 250Va Dimmer Switch
- PRW147** 3 Gang 2 Way 250Va Dimmer Switch
- PRW148** 4 Gang 2 Way 250Va Dimmer Switch

We recommend the use of branded halogen lamps with all Polar™ leading edge dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed to use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact Click® Technical support team.

**Standards:** BS EN 60669-1 BS EN 55015 BS EN 61000-3-2 BS EN 61000-3-3

**Type:** Leading Edge

**Back Box Depth:** 25mm Minimum

**Cable Size:** 2 x 1.5mm<sup>2</sup>

**Dimensions:** 1 Gang: 86mm (W) x 86mm (H) x 11mm (D) 2 Gang: 146mm (W) x 86mm (H) x 11mm (D)



PRW161



PRW162



PRW163



PRW164

**Dimmer Modules**

- MD9001** 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
- MD9010** 1-10V Analogue Dimmer Module (25 x 62mm)
- MD9022** 250W 2 Leading Edge Way Dimmer Module (25 x 62mm)
- MD9042** 400W 2 Way Leading Edge Dimmer Module (25 x 62mm)
- MD9014** 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)



SP900

MD9014

**Dimmer M10 Nut Runner**

- SP900** Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate

**Dimmer Switches (Trailing Edge)**

- PRW161** 1 Gang 2 Way 100W Dimmer Switch
- PRW162** 2 Gang 2 Way 100W Dimmer Switch
- PRW163** 3 Gang 2 Way 100W Dimmer Switch
- PRW164** 4 Gang 2 Way 100W Dimmer Switch

We recommend the use of branded LED lamps with all Polar™ trailing edge dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. For further information please contact Click® Technical support team.

**Standards:** BS EN 60669-1 BS EN 60669-2-1 BS EN 55015 BS EN 61000-3-2

**Type:** Trailing Edge

**Back Box Depth:** 25mm Minimum

**Cable Size:** 2 x 1.5mm<sup>2</sup>


**Dimensions:** 1 Gang: 86mm (W) x 86mm (H) x 11mm (D) 2 Gang: 146mm (W) x 86mm (H) x 11mm (D)



PRW145PL



PRW146PL

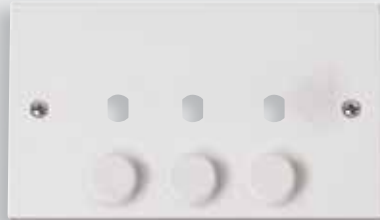

PRW147PL



PRW148PL

**Dimmer Modules**

- MD9001** 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
- MD9010** 1-10V Analogue Dimmer Module (25 x 62mm)
- MD9022** 250W 2 Leading Edge Way Dimmer Module (25 x 62mm)
- MD9042** 400W 2 Way Leading Edge Dimmer Module (25 x 62mm)
- MD9014** 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)



SP900



MD9014

**Dimmer M10 Nut Runner**

- SP900** Dimmer M10 Nut Runner Tool  
Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate

**Dimmer Mounting Unfurnished Plates**

- PRW145PL** 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
- PRW146PL** 2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
- PRW147PL** 3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
- PRW148PL** 4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures

The dimmer modules are supplied separately to the plates listed above.

Standards: BS 5733  
 Back Box Depth: Dependent On Plate Used  
 Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 11mm (D) 2 Gang: 146mm (W) x 86mm (H) x 11mm (D)

# Power Socket Outlets, Fused Connection Units & Control Switches

All socket outlets are tested and approved to BS1363. Socket outlets are available with single or double pole switches. Twin earth terminals are available on 1 and 2 gang socket outlets in order to comply with regulation 607 of BS7671 IEE Wiring Regulations. As with the plate switches, the actual switch rocker features a gentle curved appearance.




- 13A Wall Socket Outlets | USB Sockets
- Round Pin Wall Socket Outlets | Fused Connection Units
- Fan Isolation Switches | DP Switches





PRW034




PRW038



PRW039



PRW030EX

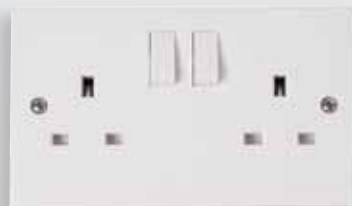

PRW036 | PRW606




PRW035 | PRW605 | PRW635



PRW037



PRW1035 | PRW1635

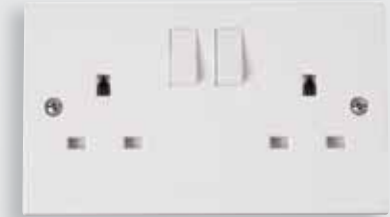

PRW1036 | PRW1037




PRW771U



PRW770



PRW780

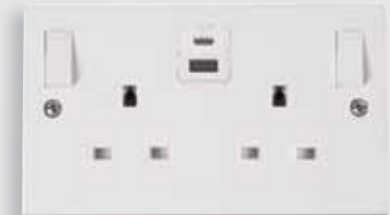

PRW786

**Switched Socket Outlets**

- PRW035** 13A 1 Gang DP Switched Socket
- PRW036** 13A 2 Gang DP Switched Socket (Twin Earth)
- PRW037** 13A 2 Gang DP Switched Clean Earth Socket
- PRW605** 13A 1 Gang Switched Socket
- PRW606** 13A 2 Gang Switched Socket
- PRW635** 13A 1 Gang DP Switched Socket With Twin Earth Terminals

**Unswitched Socket Outlets**

- PRW030** 13A 1 Gang Unswitched Socket
- PRW032** 13A 2 Gang Unswitched Socket
- PRW030EX** 13A 1 Gang Unswitched Socket - Printed 'Not To Be Used For Outdoor Appliances'
- PRW630** 13A 1 Gang Unswitched Socket With Twin Earth Terminals

**Round Pin Socket Outlets**

- PRW034** 15A Switched Round Pin Socket
- PRW038** 5A Round Pin Socket
- PRW039** 2A Round Pin Socket

**Switched Safety Shutter Socket Outlets**

- PRW1035** 13A 1 Gang DP 3 Pin Safety Shutter Switched Socket
- PRW1036** 13A 2 Gang DP 3 Pin Safety Shutter Switched Socket (Twin Earth)
- PRW1037** 13A 2 Gang DP 3 Pin Safety Shutter Switched Clean Earth Socket
- PRW1635** 13A 1 Gang DP 3 Pin Safety Shutter Switched Socket (Twin Earth)

**Switched Sockets With USB Outlets**

- PRW771U** 13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
- PRW770** 13A 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
- PRW780** 13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)
- PRW786** 13A 2 Gang Switched Safety Shutter Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)

Standards: BS 1363-2 034 038 039; BS 546 **Back Box Depth:** 25mm Minimum  
**Cable Size:** 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup> 034: 3 x 2.5mm<sup>2</sup> 038: 4 x 1.5mm<sup>2</sup> or 3 x 2.5mm<sup>2</sup> 039: 3 x 1.5mm<sup>2</sup>  
**Dimensions:** 1 Gang: 86mm (W) x 86mm (H) x 11mm (D) 2 Gang: 146mm (W) x 86mm (H) x 11mm (D)

Standards: BS 1363-2 USB: BS 1363-2: 2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1  
**Back Box Depth:** 25mm Minimum **Cable Size:** 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
**Dimensions:** 1 Gang: 86mm (W) x 86mm (H) x 11mm (D) 2 Gang: 146mm (W) x 86mm (H) x 11mm (D)





PRW049 | PRW050



PRW051



PRW052



PRW053



PRW290



PRW291



PRW020



PRW021



PRW023



PRW024



PRW040



PRW042



PRW660



PRW675

**Fused Connection Units With Optional Flex Outlet**

- PRW049** 3A Fused Connection Unit
- PRW050** 13A Fused Connection Unit
- PRW051** 13A Switched Fused Connection Unit
- PRW052** 13A Switched Fused Connection Unit With Neon
- PRW053** 13A Fused Connection Unit With Neon

**Fused Control Switch Plates**

- PRW290** 3A FCU With DP Switch (Linked)
- PRW291** 3A FCU With DP Switch & DP Fan Switch (Linked)

**Fan Isolation Switch**

- PRW020** 10A 3 Pole Fan Isolation Switch
- PRW021** 10A 3 Pole Isolation Switch

**20A Control Switches with Optional Flex Outlet**

- PRW022** 20A DP Switch
- PRW023** 20A DP Switch With Neon
- PRW040** 20A DP 'Water Heater' Switch
- PRW042** 20A DP 'Water Heater' Switch With Neon

**20A DP Sink/Bath Switch**

- PRW024** 20A DP Sink/Bath Switch With Neon

**Lockable Switch**

- PRW660** 20A Double Pole Key Lockable Switch  
Two keys provided (Spare keys available: SP660)

**Lockable Socket**

- PRW675** 13A 1G DP Key Lockable Socket With Neon  
Two keys provided (Spare keys available: SP660)

Standards: BS 1363-4 BS 1362 290 291: BS EN 60669-1 BS 5733  
 Back Box Depth: 25mm Minimum 290 291: 16mm Minimum  
 Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup> 049: 4 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup> 290 291: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
 Dimensions: 86mm (W) x 86mm (H) x 11mm (D)

Standards: BS EN 60669-1 675: BS 1363-2  
 Back Box Depth: 25mm Minimum 660 675: 35mm Minimum  
 Cable Size: 3 x 2.5mm<sup>2</sup> 660 675: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 11mm (D) 2 Gang: 146mm (W) x 86mm (H) x 9.5mm (D)



PRW200




PRW201




PRW202



PRW203

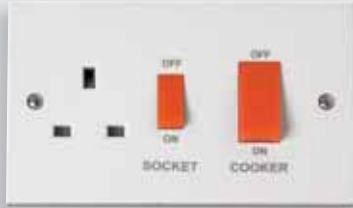

PRW204

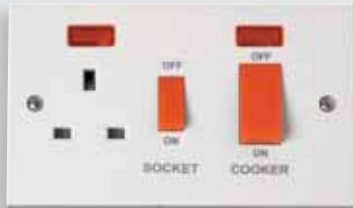

PRW205

**45A Switches And Socket Outlets**

- PRW200** 45A 1 Gang DP Switch
- PRW201** 45A 1 Gang DP Switch With Neon
- PRW202** 45A 2 Gang DP Switch
- PRW203** 45A 2 Gang DP Switch With Neon
- PRW204** 45A 2 Gang DP Switch With 13A DP Switched Socket
- PRW205** 45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669-1 204 205: BS 4177  
 Back Box Depth: 35mm Minimum  
 Cable Size: 1 x 16mm<sup>2</sup>  
 Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 11mm (D) 2 Gang: 146mm (W) x 86mm (H) x 11mm (D)  
 202 203: 86mm (W) x 146mm (H) x 11mm (D)



PRW500



PRW501




PRW502



PRW503



PRW504

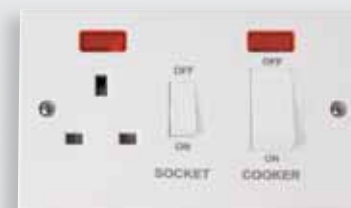

PRW505

**45A Switches And Socket Outlets With White Rockers**

- PRW500** 45A 1 Gang DP Switch With White Rocker
- PRW501** 45A 1 Gang DP Switch With White Rocker & Neon
- PRW502** 45A 2 Gang DP Switch With White Rocker
- PRW503** 45A 2 Gang DP Switch With White Rocker & Neon
- PRW504** 45A 2 Gang DP Switch With 13A DP Switched Socket & White Rockers
- PRW505** 45A 2 Gang DP Switch With 13A DP Switched Socket, White Rockers & Neons

Standards: BS EN 60669-1 504 505: BS 4177  
 Back Box Depth: 35mm Minimum  
 Cable Size: 1 x 16mm<sup>2</sup>  
 Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 11mm (D) 2 Gang: 146mm (W) x 86mm (H) x 11mm (D)  
 502 503: 86mm (W) x 146mm (H) x 11mm (D)



PRW208



PRW210 | PRW211



PRC009



PRC210



PRW213



PRC216

essentials™

Decorative covers available for PRC210/216, see Essentials™ page M30.

Fan Isolation Pull Cord Switches

**PRW208** 10A 3 Pole Fan Isolation Pull Cord Switch

45A & 50A Pull Cord Switches

**PRW210** 45A DP Pull Cord Switch With Mechanical 'On/Off' & Neon

**PRW211** 50A DP Pull Cord Switch With Mechanical 'On/Off' & Neon

**PRW213** 50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon & Pattress

10AX & 16A Pull Cord Switches

**PRC009** 10AX 2 Way Ceiling Pull Cord Switch

**PRC210** 10AX 2 Way Pull Cord Switch


**PRC216** 16A DP Pull Cord Switch With Neon

Suffix RD (Red cord & bangle) or AG (Anthracite Grey cord & bangle) to the above codes for product to be supplied with required cord and bangle. Example: A 10AX 2 Say Pull-cord Switch with red cord and bangle will become product code PRC210RD.

**Standards:** BS EN 60669-1 **Backbox:** Supplied 211: 47mm 208: 25mm Minimum 210: 35mm Minimum

**Cable Size:** 2 x 1.5mm<sup>2</sup> or 1 x 2.5mm<sup>2</sup> 210: 1 x 6mm<sup>2</sup> 211 213: 1 x 25mm<sup>2</sup>

**Dimensions:** 86mm (W) x 86mm (H) x 43mm (D) 009: 76mm Diameter x 51.5mm 210 216: 70mm (Dia) x 42mm (D)  
PRW213: 100mm (Dia) x 77mm (D)

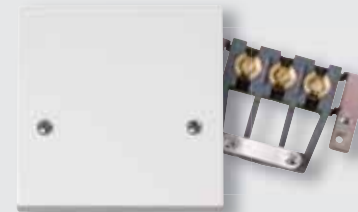

PRW215



PRW217



PRW218

45A Cooker Connection Plates

**PRW215** 45A 1 Gang Cooker Connection Plate

UK Design Registration No. 3015175

Pattress Box for PRW217 - Urea

**PRW218** 35mm Deep Pattress Box For Use With PRW217

45A Cooker Outlet Plates

**PRW217** 45A Easyfit Dual Appliance Outlet Plate

UK Design Registration No. 3015175

Utilises standard 1 gang back box 25mm deep minimum.

**Standards:** BS 5733

**Back Box Depth:** 215: 35mm Minimum 217: 25mm Minimum **Cable Size:** 215: 2 x 10mm<sup>2</sup> 217: 1 x 10mm<sup>2</sup>

**Dimensions:** 215: 86mm (W) x 86mm (H) x 22.5mm (D) 217: 85mm (W) x 130mm (H) x 27mm (D)

218: 85mm (W) x 130mm (H) x 37.5mm (D)




PRW100



PRW090



PRW017

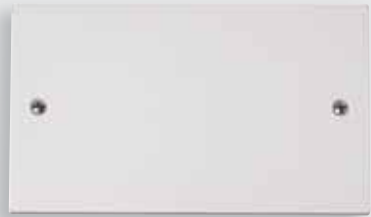

PRW061

**Flex Outlet Plates**

**PRW017** 20A Flex Outlet Plate

**Blank Plates**

**PRW060** 1 Gang Blank Plate

**PRW061** 2 Gang Blank Plate

**Connector Box**

**PRW090** 15A 10 Way Surface Connector Box  
(for use with central heating installations)

**Dual Voltage Shaver Socket**

**PRW100** 115/230V Dual Voltage Shaver Socket

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010 making it safe for use in bathrooms. Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

**Standards:** BS 5733 090; BS 4662 100; BS EN IEC 61558-1 BS EN 61558-2-5  
**Back Box Depth:** 16mm Minimum 090; Supplied, 100; 47mm  
**Cable Size:** 017: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup> 090: 2 x 1.5mm<sup>2</sup> or 1 x 2.5mm<sup>2</sup> 100: 2 x 1.5mm<sup>2</sup> or 1 x 2.5mm<sup>2</sup>.  
**Dimensions:** 1 Gang: 86mm (W) x 86mm (H) x 11mm (D) 2 Gang: 146mm (W) x 86mm (H) x 11mm (D)  
 090: 147mm (W) x 87mm (H) x 41mm (D) 100: 86mm (W) x 146mm (H) x 11mm (D)


# TV, Telephone & Data Sockets

Providing the means to facilitate the connection of modern communications equipment is as important today as it is to provide the electrical power to operate them.

This section of the catalogue is devoted to the New Media™ range of plate accessories which includes products for connecting telephone, computer, television and satellite devices.




RJ11 Outlet | UK Telephone Outlets  
 Satellite Socket Outlets | Coaxial Sockets

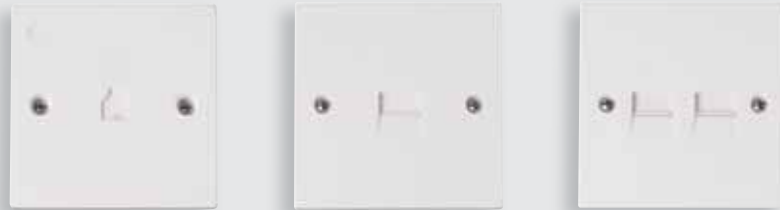

PRW115

PRW119 | PRW120  
PRW124 | PRW125

PRW121 | PRW122  
PRW126 | PRW127

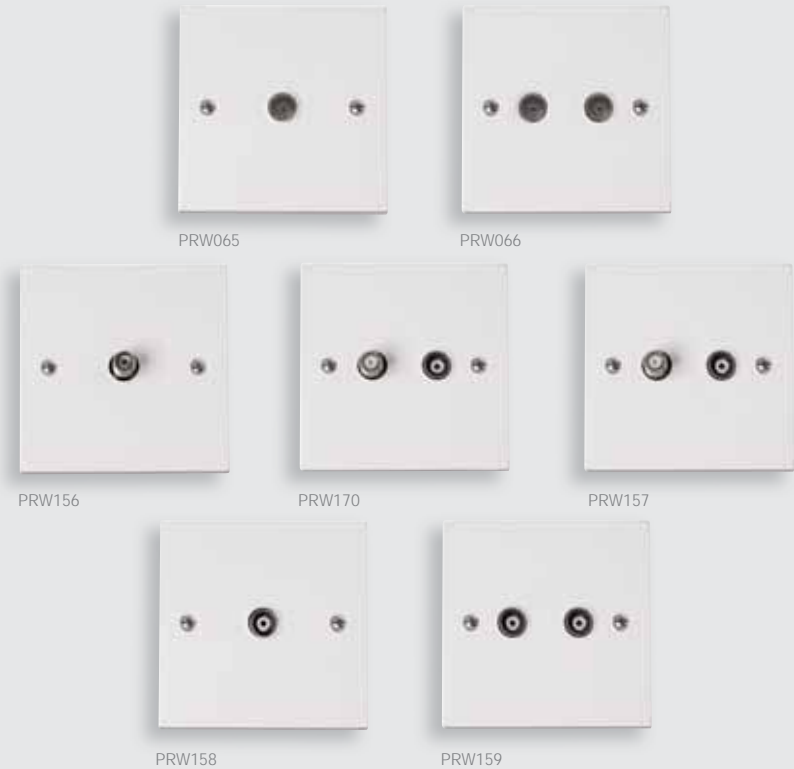

PRW065

PRW066

PRW156

PRW170

PRW157

PRW158

PRW159

Twin outlets are 2 separate sockets and not internally linked together.

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

**RJ11 Telephone Outlet - PC**

**PRW115** Single RJ11 (Irish/US) Outlet

**Telephone Outlets - Urea**

**PRW119** Single Telephone Outlet - Master

**PRW122** Twin Telephone Outlet - Master

**PRW124** Single Telephone Outlet - Secondary

**PRW127** Twin Telephone Outlet - Secondary

**Telephone Outlets - PC**

**PRW120** Single Telephone Outlet - Master

**PRW121** Twin Telephone Outlet - Master

**PRW125** Single Telephone Outlet - Secondary

**PRW126** Twin Telephone Outlet - Secondary

**Non-isolated Coaxial Outlets (Unshielded)**

**PRW065** Single Coaxial Outlet

**PRW066** Twin Coaxial Outlet

**Satellite Outlets (Unshielded)**

**PRW156** Non-isolated Single Satellite Outlet

**PRW170** Non-isolated Satellite & Non-isolated Coaxial Outlet

**PRW157** Isolated Satellite & Isolated Coaxial Outlet

**Isolated Coaxial Outlets (Unshielded)**

**PRW158** Single Isolated Coaxial Outlet


**PRW159** Twin Isolated Coaxial Outlet

**Back Box Depth:** 16mm Minimum 115: 35mm Minimum  
**Termination Type:** IDC 115: Screw  
**Dimensions:** 115: 86mm (W) x 86mm (H) x 11mm (D)  
 Urea: 86mm (W) x 86mm (H) x 11mm (D)  
 PC: 85mm (W) x 85mm (H) x 8mm (D)

**Back Box Depth:** 16mm Minimum  
**Dimensions:** 1 Gang: 86mm (W) x 86mm (H) x 11mm (D)



PRW310

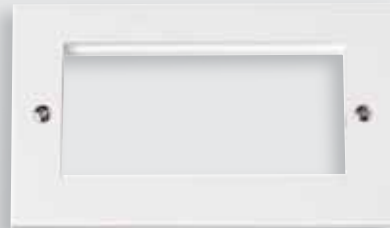

PRW312



PRW311



MM410BK



MM405WH



MM501BK



MM440BK



For a complete range of New Media™ modules please see our dedicated New Media™ catalogue.

**Unfurnished Plates - New Media™**

- PRW310** 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- PRW311** 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- PRW312** 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of TV, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.

**Standards:** BS 5733  
**Back Box Depth:** Dependent On Modules Fitted  
**Dimensions:** 1 Gang: 86mm (W) x 86mm (H) x 11mm (D) 2 Gang: 146mm (W) x 86mm (H) x 11mm (D)



PRW080



PRW081




PRW082



PRW084



PRW089



PRW091



PRW175



PRW176

essentials™

For the complete range of back boxes see Essentials™ page M4.

**PVC Pattress Boxes**

- PRW230** 1 Gang 29mm Deep PVC Pattress Box - Trunking
- PRW240** 1 Gang 29mm Deep PVC Pattress Box - Conduit
- PRW235** 2 Gang 29mm Deep PVC Pattress Box - Trunking
- PRW245** 2 Gang 29mm Deep PVC Pattress Box - Conduit

**Architrave Pattress Boxes**

- PRW175** 1 Gang 19mm Deep Architrave Pattress Box with Earth Terminal
- PRW176** 2 Gang 19mm Deep Architrave Pattress Box with Earth Terminal  
For Polar™ products only

**Converter Pattress Box**

- PRW091** 1 Gang To 2 Gang 16mm Deep Converter Pattress

**Moulded Pattress Boxes**

- PRW080** 1 Gang 16mm Deep Pattress Box With Earth Terminal
- PRW081** 1 Gang 25mm Deep Pattress Box
- PRW083** 1 Gang 35mm Deep Pattress Box
- PRW084** 2 Gang 35mm Deep Pattress Box
- PRW085** 1 Gang 47mm Deep Pattress Box With Earth Terminal
- PRW086** 2 Gang 47mm Deep Pattress Box Fitted With Cable Restraint & Earth Terminal
- PRW082** 2 Gang 25mm Deep Pattress Box
- PRW089** Dual Accessory 29mm Deep Pattress Box With Earth Terminal



WA095



WA102



WA106P



WA107P



GA100



WA4247

**MINIGRID®**

For the complete range of back boxes see Essentials™ page M4.

**Galvanised Steel Back Boxes**

- WA092** 1 Gang 16mm Deep Galvanised Steel K.O. Box
- WA093** 1 Gang 25mm Deep Galvanised Steel K.O. Box
- WA094** 2 Gang 25mm Deep Galvanised Steel K.O. Box
- WA095** 1 Gang 35mm Deep Galvanised Steel K.O. Box
- WA096** 2 Gang 35mm Deep Galvanised Steel K.O. Box
- WA097** 1 Gang 47mm Deep Galvanised Steel K.O. Box
- WA098** 2 Gang 47mm Deep Galvanised Steel K.O. Box
- WA099** 1 + 1 35mm Deep Dual Accessory Box
- WA102** 1 + 2 35mm Deep Dual Accessory Box
- WA671** 1 Gang 25mm Deep Architrave Box With 60.3mm Hole Centres
- WA672** 2 Gang 25mm Deep Architrave Box With 120.6mm Hole Centres

**'Ezylink' Dry Lining Box Connector**

- GA100** 'Ezylink' Dry Lining Box Connector

**Dry Lining Boxes**

- WA087P** 1 Gang 35mm Deep Dry Lining Box
- WA088P** 2 Gang 35mm Deep Dry Lining Box
- WA106P** 1 Gang 47mm Deep Dry Lining Box
- WA107P** 2 Gang 47mm Deep Dry Lining Box
- WA108P** Round Ceiling 34mm Deep Dry Lining Box

**FlameGuard® Dry Lining Boxes**

- WA4135** 1 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4235** 2 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4147** 1 Gang 47mm Deep FlameGuard® Dry Lining Box
- WA4247** 2 Gang 47mm Deep FlameGuard® Dry Lining Box